



**International Workshop  
Livestock, Climate Change and the Environment**



**Studying on pig manure treatment  
in order to minimize environmental pollution  
and use bioenergy**

**Vu Dinh Ton and Nguyen Van Duy**

*Centre for Interdisciplinary Research on Rural Development,  
Hanoi University of Agriculture*

**Email: [vdton@hua.edu.vn](mailto:vdton@hua.edu.vn)**



## Introduction

Pig production plays an important role (meat supply, income, soil fertility)

Pig population increased about one millions per year (Before 2007)


Pig production in large scale farms is more and more important

→ ***Pig wastes management?***

An Giang, 16-18 Nov



International workshop  
“Livestock, Climate Change and the Environment”

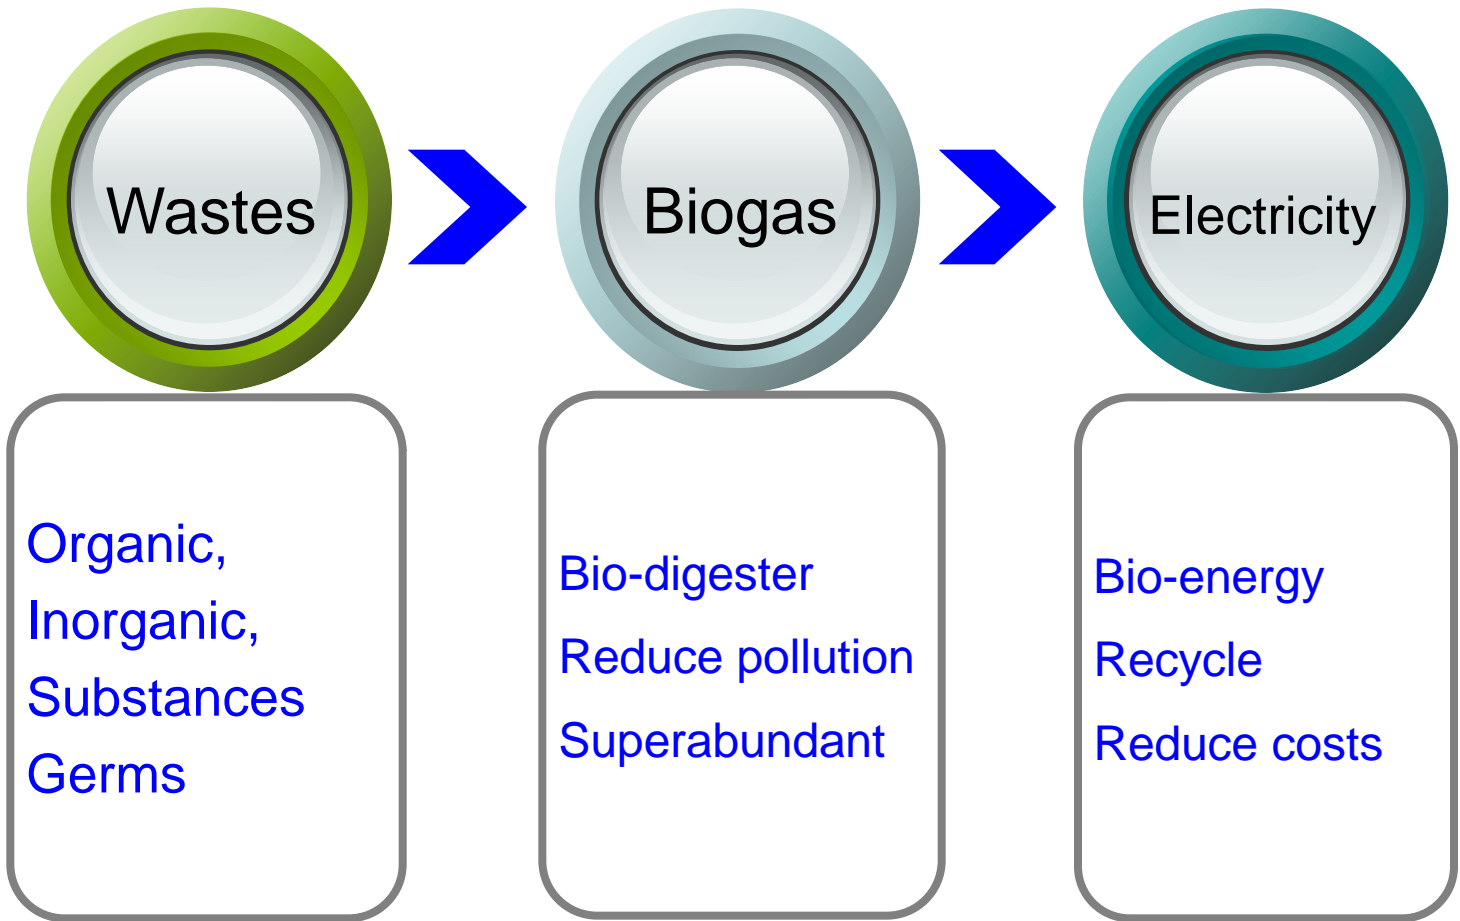



International workshop  
“Livestock, Climate Change and the Environment”



**Materials and methods**

**An Giang, 16-18 Nov**



Pig manure  
production

- Study was carried out at a pig farm in Hung Yen in two seasons (winter and summer) from October 2008 to August 2009 (measured 8 times per month)
- Identify feed consumption and daily waste rejected by different kinds of pig (growing pigs and sows)
- Coefficient of manure rejection was determined by the ratio between rejected manure and consumed feed



**Biogas  
treatment  
and  
Electricity**

- Identifying biogas produced by the method of volumetric measurement of biogas bags
- Analyzing some chemical criteria such as BOD<sub>5</sub>, COD, dissolved sulphide, Cu<sup>2+</sup>, Zn<sup>2+</sup>, Cl<sup>-</sup>, NH<sub>4</sub>-N in liquid waste before and after the treatment by biogas system
- The electric energy produced from an electric generator running with biogas is measured by a watt-hour meter



International workshop  
“Livestock, Climate Change and the Environment”



**Results and discussion**

**An Giang, 16-18 Nov**



International workshop  
“Livestock, Climate Change and the Environment”



**Table 1. Pig production scale of the studied farm**

<b>Kind of pigs</b>	<b>Unit</b>	<b>Quantity</b>
Sows	Head	36
Boars	Head	3
No of weaned piglets	Head/year	200
Weight of weaned piglets	Ton/year	1.5
No of fattened pigs	Head/year	300
Weight of fattened pigs	Ton/year	33



International workshop  
“Livestock, Climate Change and the Environment”



**Table 2. Feed intake and coefficient of manure rejection of different pig categories (n=48)**

Kind of pigs	Consumed feed (kg/head/day)	Rejected manure (kg/head/day)	Coefficient of manure rejection
	Mean $\pm$ SEM	Mean $\pm$ SEM	Mean $\pm$ SEM
Weaned – 15kg	0.42 $\pm$ 0.01	0.25 $\pm$ 0.01	0.59 $\pm$ 0.01
15-30 kg	0.76 $\pm$ 0.01	0.47 $\pm$ 0.01	0.61 $\pm$ 0.02
30-60 kg	1.64 $\pm$ 0.02	0.80 $\pm$ 0.02	0.49 $\pm$ 0.01
60 kg – finishing age	2.30 $\pm$ 0.02	1.07 $\pm$ 0.01	0.46 $\pm$ 0.05
Sow in gestation I and waiting for insemination	1.86 $\pm$ 0.01	0.80 $\pm$ 0.01	0.43 $\pm$ 0.01
Sow in gestation II	2.12 $\pm$ 0.01	0.88 $\pm$ 0.01	0.41 $\pm$ 0.01
Suckling sow	3.7 $\pm$ 1.54	1.62 $\pm$ 1.57	0.44 $\pm$ 1.58

An Giang, 16-18 Nov



**International workshop**  
**“Livestock, Climate Change and the Environment”**



**Table 3. Estimating the manure annual production for fattened pigs and sows**

<b>Pig category</b>	<b>Fattened pig*</b> (estimating for one fattened pig's life)	<b>Sows</b> (estimating for 1 year)
Consumed feed (kg)	257.50	797.00
Manure produced (kg)	127.05	342.22
Coefficient of manure rejection	0.54	0.43

*\* Fattened pigs are counted after weaning to finishing, ready for slaughter (110kg)*



**International workshop**  
**“Livestock, Climate Change and the Environment”**



**Table 4. Biogas quantity generated by waste treatment in winter and summer (n=6)**

Criteria	Unit	Winter	Summer
		Mean ± SEM	Mean ± SEM
Temperature	°C	14.93 ± 0.14	32.56 ± 0.30
Humidity	%	77.50 ± 1.52	81.12 ± 0.36
Manure to biodigester	kg/day	39.03 ± 2.09	40.18 ± 2.05
Liquid waste to biodigester	m <sup>3</sup> /day	6.85 ± 0.36	7.19 ± 0.42
Biodigester volume	m <sup>3</sup>	24	24
Biogas generated after 24 hours	m <sup>3</sup> /day	4.16 ± 0.22	9.06 ± 0.46



**International workshop**  
**“Livestock, Climate Change and the Environment”**



**Table 5. Efficiency of biogas transformation to electric energy**

<b>Criteria</b>	<b>Winter</b>	<b>Summer</b>
	<b>Mean</b>	<b>Mean</b>
<b>Biogas produced per day (m<sup>3</sup>/day)</b>	4.16	9.06
<b>Number of kW generated (kW)</b>	4.50	9.80
<b>Biogas quantity generating 1 kW (m<sup>3</sup>)</b>	0.92	0.92



International workshop  
“Livestock, Climate Change and the Environment”



**Table 6. Chemical criteria of liquid waste before and after treatment of biogas**

Criteria (mg/lit)	Before treatment	After treatment	Tolerable hygienic standard*
	Mean $\pm$ SEM	Mean $\pm$ SEM	
BOD <sub>5</sub>	1030.11 $\pm$ 2.86	235.50 $\pm$ 3.29	300
COD	2019.78 $\pm$ 3.81	341.81 $\pm$ 2.55	400
Sulfua	28.45 $\pm$ 0.45	3.37 $\pm$ 0.15	1
Cu <sup>2+</sup>	0.67 $\pm$ 0.22	0.32 $\pm$ 0.03	5
Zn <sup>2+</sup>	0.35 $\pm$ 0.04	0.22 $\pm$ 0.01	5
Cl <sup>-</sup>	336.57 $\pm$ 5.75	237.50 $\pm$ 1.45	-
NH <sub>4</sub> <sup>+</sup>	6.51 $\pm$ 0.13	3.13 $\pm$ 0.05	5

\* according to 10TCVN 678 – 2006



International workshop  
“Livestock, Climate Change and the Environment”



# Conclusions

An Giang, 16-18 Nov



- The coefficients of manure rejection was lowest in sows (0.43) followed by fattened pigs from 60 kg to finished (0.46), pigs from 15 kg to 30 kg have the highest coefficient (0.61)
- Produced biogas quantities in summer were over 2 times higher than those in winter
- The coefficient of biogas transformation to electric energy is rather high (0.92 m<sup>3</sup>), generating 1 kW
- Using biogas digestors can reduce the environmental pollution, especially with respect to BOD<sub>5</sub> and COD concentrations

—→ *Developing the biodigester for treating the animal waste can contribute to reducing the environmental pollution as well as having an important source of bioenergy.*



## International workshop



**An Giang, 16-18 Nov**



**An Giang, 16-18 Nov**



## International workshop



**An Giang, 16-18 Nov**



“Lives

nent”



An Giang, 16-18 Nov